



2013/14



MOVING HEAD FL-201 BEAM ZOOM, FOCUS

[F1000367]

MOVING HEAD FL-330 BEAM ZOOM, FOCUS

[F1000368]

- Lamp: 200W or 330W
- LUX (FOR FL-201): 142500 @ 10m, 84300 @ 15m
- LUX (FOR FL-330): 186000 @ 20m, 48175 @ 40m
- Electronic Zoom
- Beam angle: 0-2,3°, frost angle 30° -60°
- Electronic Focus
- Roto Prism 3-face
- Roto Prism 8-face
- 8 Roto Gobo and Colour Wheel
- Fixtures: Remote controller lamp's switch function, display light and lamp's
- DMX: 16 – 20 channels
- Power Supply: AC90-240V 50-60Hz
- Power: max 460W
- Box Size: 450x430x530(mm)
- Weight: 19kg



NEW! 15R MOVING HEAD ALL IN ONE

[F1000370]

- Beam, Spot, Wash
- Lamp: 330W 15R
- Zoom 5°-60°
- Focus, Roto Prism, Static Gobo, Roto Gobo
- Colour Whell, CMY Mixing
- Iris , Frost
- Dimmer, Double Strobe
- DMX512: 21, 23, 34 channels
- Fixtures: Remote controller lamp's switch function, display light and lamp's
- Voltage: 90-230V AC, 50-60Hz
- Power Consumption: 490W
- Size: 64x42x38cm
- Weight: 23kg



LED MOVING HEAD STRONG II 108x3W RGBW CREE BEAM 5°/25°

NEW!

[F7000577]

- Light Source: 3W LED CREE Qty: R18,G36, B36, W18
- Beam angle: 5°; included an additional filter increases the beam angle to 25°
- Control: On-board: Display for Auto and Custom control;
- Control Protocol:DMX512; Sound activated
- DMX512: 9, 12, 16 channels
- Power Consumption: 340W
- Cooling: Forced Convection; New cooling fans
- reduce noise by around 20dB
- Dimensions: 430x320x200mm; Weight: 8 Kg



LED MOVING HEAD STRONG 108x3W RGBW WASH 25°

NEW!

[F7000579]

- Light Source: 3W LED Qty: R18,G36, B36, W18
- Beam angle: 25°; Optional - the lens with angle 15°
- Control: On-board: Display for Auto and Custom control;
- Control Protocol:DMX512; Sound activated
- DMX512: 13 channels
- Power Consumption: 360W
- Cooling: Forced Convection; New cooling fans
- reduce noise by around 20dB
- Dimensions: 435x330x230mm; Weight: 11 Kg




LED MOVING HEAD BEAM 12x10W RGBW 4in1 CREE 8°/25°

NEW!

[F7000566]

- LED: 12x10W RGBW 4in1 CREE
- 12pcs quad color RGBW Cree leds infinite RGBW color mixing system
- Lux 40500+@2m
- DMX512: 15ch
- Beam Angle: 8°, included an additional filter increases the beam angle to 25°
- Dimmer: 0-100%
- Power Supply: 90-230V AC
- Power 135W
- Size: 29x18.3x32cm
- Weight: 6kg

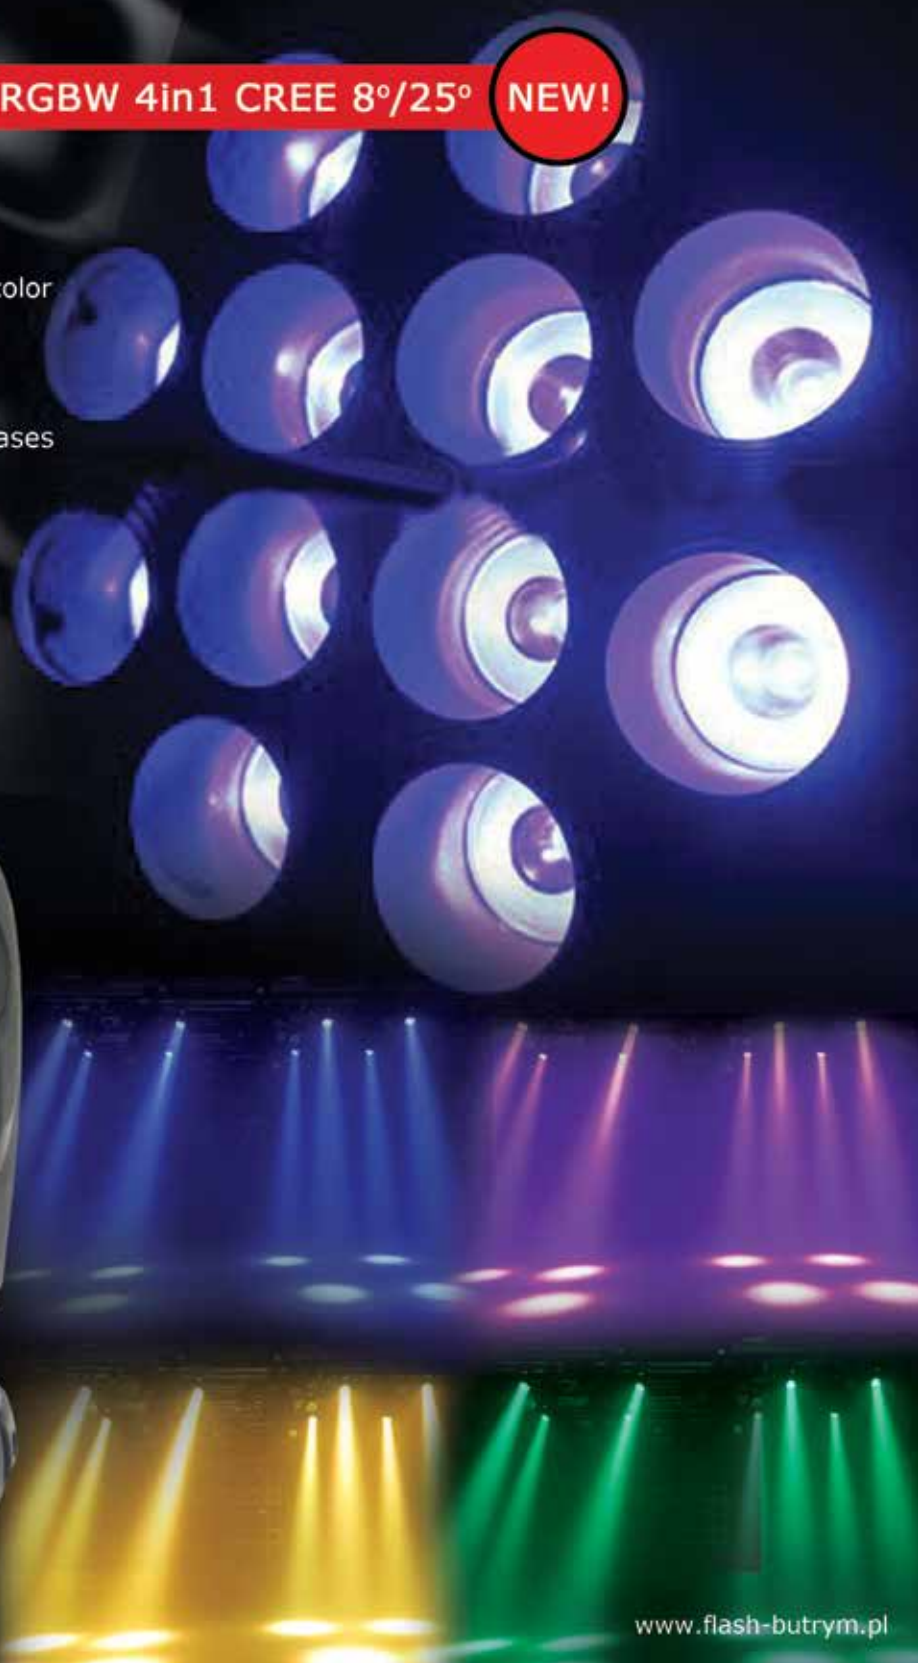


LED MINI BEAM 18x3W RGB CREE 5° +FILTER 25°

NEW!

[F7000560]

- LEDs 18x3W RGB CREE
- Beam angle: 5°
- Additional lens amending angle to 25° – WASH
- DMX Control: 5/12 Channel
- Power Consumption: 90 Watts
- Dimensions: 225x225x270mm
- Net Weight: 4.2Kg

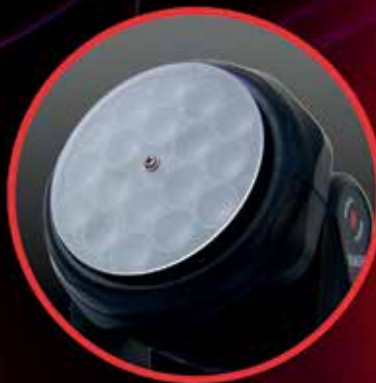


LED MOVING HEAD FL-101 36x3W RGBW 8° CREE + FILTER 25°

NEW!

[F7000565]

- LED: 36x3W RGBW CREE
- Illumination: 29000lux @2m
- Color calibrated
- Beam Angle: 8°, included an additional filter increases the beam angle to 25°
- Power Supply: 90-230V AC
- Power 143W
- Size: 305x260x150mm; Weight: 5kg

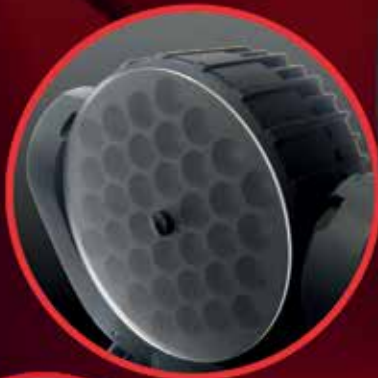

LED MOVING HEAD DOUBLE 72x3W RGB + WA

[F7000587]

- Power Supply: 110V/230V AC 50-60Hz
- power consumption max 230W
- LED: 36x3W RGB + 36x3W WA (DOUBLE)
- Control: DMX512, Auto, Sound, Master/ Slave
- DMX: 13 channels
- Color Mixing
- Dimmer
- Strobe
- Weight: 6,6kg
- Size: 260x260x350mm



LED MOVING HEAD 4 in 1 RGBW WASH 144W

[F7000557]

Voltage: AC110/220-240V 50Hz/60Hz •
RGB color mixing • 12 DMX Channels
• Dimmer • Strobe • 12pcs 12W LEDs 4
in 1 RGBW • Programs in-built • Activated
sound • Master-Slave • Weight: 5 kg



LED MOVING HEAD 144W WASH 4 in 1 RGBW ZOOM

[F7000556]

Voltage: AC110/220-240V 50Hz/60Hz • RGB color mixing • 13
DMX Channels • Dimmer • Strobe • 12pcs 12W LEDs 4 in 1 RGBW
• Programs in-built • Activated sound • Master-Slave • Weight: 5 kg

LED 9W RGB DMX SPOT

[F7000640]

Power Supply: AC90-230V, 50Hz • Power consumption: 26W • Number of DMX channels: 5 • DMX-512 connection: 3,5mm stereo jack plug (we offer you an adapter "mini-jack - XLR") • 9W 3 in 1 LED • LED beam angle: 6° • Dimensions: 135x165x170mm • Weight: 0,5kg



LED MINI WASH 7x10W 4in1 **NEW!**

[F7000563]

- Power Supply AC90-230V, 50Hz-60Hz
- Power consumption: 80W
- Fixing lamp: LED 7pcs*10W RGBW
- DMX-Control-channels: 4 or 14, select from control board
- Color: RGBW Color-mixture
- Shuttle: Flash rate: 0-10Hz
- Dimmer: 0-100% mechanic dimmer
- Maximum PAN-movement: 540
- Maximum TILT-movement: 270
- Master/Slave activated by sound at pre-programmed function



Moving Head LED 15W mini

[F7000500] black

[F7000501] white

High light output with 1 x 15 watt LED ! • Easy installation and operation • Trendy heavy duty housing • RGB Colour mixing system • Gobo wheel with 9 gobo's and rainbow function • 16 bit pan/tilt resolution • Power supply: AC 230V, 50 Hz - Power consumption: 50 Watt • LED system: 1 pcs 15 watt • User modes: Standalone, Master/Slave, Music • DMX-512: 5 or 13 channels • Signal connector: XLR 3 pole male/female • Pan: 540 • Tilt: 270 • Dimensions: 175 x 175 x 260 mm (LxWxH) • Weight: 3.6Kg



LED MOVING HEAD

LED MOVING HEAD 60W SPOT
[F7000550]

LED MOVING HEAD 30W SPOT
[F7000506]

Voltage: AC110/220-240V 50Hz/60Hz • 1 white Led 60W; 30W • 12 DMX Channels • Dimmer • Strobe • Auto Focus • 3-facet Prism • 1 wheel 7 colors + White • 1 wheel 6 gobos + White • Rotating Gobos 2 ways • Programs in-built • Activated sound • Master-Slave • Weight: 7 kg

NEW! LED MOVING HEAD 120W

[F7000553]

- LED: 1x 120W high brightness white LED unit
- LUX: LUX 5100 @2m
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 16 DMX Channels
- Roto Gobo: 6 metals gobo
- Prism 3-face
- Input Voltage: AC90-260V 50-60Hz
- Power Consumption: 200W
- Size: 203x300x437mm
- Weight: 11kg

LED SCANNER 60W

[F7000196]

- Light temperatur 8000K, 2400lux@2m
- High performance mobile DMX scanner with 1x 60W LED source
- 7 colors + white
- 7 rotating gobos + spot
- separate color & gobo wheels
- 9 DMX channels
- 3-button menu system LED display making it easy to navigate
- 3 operational modes: DMX controller, Master/ Slave & Sound active
- built-in lighting programs
- Sound Active
- Compact & portable design
- Run all night - High velocity fan keeps unit cool - No Duty Cycle!
- Manual Focusing lens
- Gobo Shake effect
- Strobe effect in every color
- 13-degree beam angle
- DMX-512 protocol
- Fan cooled
- Hanging Bracket Included
- Output similar to a 250W Halogen lamp
- Power Consumption: 80W
- Voltage: 230V 50Hz
- dimensions: 385x200x150mm
- weight: 6kg

NEW! LED SCANNER 90W

[F7000197]

- High performance mobile DMX scanner with 1x 90W LED source
- 7 colors + white
 - 7 rotating gobos + spot
 - separate color & gobo wheels
 - 9 DMX channels
 - Run all night - High velocity fan keeps unit cool - No Duty Cycle!
 - Gobo Shake effect
 - 13-degree beam angle
 - Light temperatur 4000K, 1700lux@2m
 - Power Consumption: 130W
 - Size: 385x200x150mm; Weight: 6kg



LED MOVE WASHER 8x9W WHITE DMX **NEW!**

[F7000270]

- LED: 8x9W White
- Beam angle: 3°
- 0°-270° beam scanning
- Voltage: 90-250V/50-60Hz
- Control: DMX512, Auto, Sound Control
- Sound control: via built-in microphone
- Size: 1080x80x150mm
- Weight: 6.5Kg

LED MOVE WASHER 8x10W RGBW 4in1 DMX **NEW!**

[F7000271]

- LED: 8x10W RGBW 4in1
- Beam angle: 7°
- 0°-270° beam scanning
- Voltage: 90-250V/50-60Hz
- Control: DMX512, Auto, Sound Control
- DMX512: 10, 14, 39 channels
- Sound control: via built-in microphone
- Size: 1080x80x150mm
- Weight: 6.5Kg



UNIVERSAL LED BLINDER 5x15W RGBW 4in1 CREE **NEW!**

[F7000680]

- 5x15W RGBW 4 in 1 CREE LEDs
- strobe from fast to slow, adjusting
- electronic dimmer 0-100%
- Beam angle: 25°
- Auto, sound, DMX512(8/24CH)
- LED digital display
- Voltage AC100/240V 50/60Hz
- Power consumption: 95W
- Size: 130x320x270mm
- Weight: 3,6kg



LED WALL WASHER 36x3W RGB 4SC IP 65

[F7001011]

LED WALL WASHER 36x3W RGBW 3SC IP 65

[F7001012]

LED WALL WASHER 9x12W RGBW 3SC IP 65

[F7001013]

- Power Supply: AC110V/ 240V 50-60Hz
- 3 or 4 independent sections
- Control: DMX512/ Auto/ Master-Slave
- DMX512: 7channels or 16 channels
- Build-in program
- IP 65
- Size: 101x7,8x7,0cm
- Weight: 3,8kg



LED WASHER 30x3W WHITE IP65

NEW!

[F7001015]

- Power Supply: AC110V/ 240V 50-60Hz
- LED: 30x3W White
- IP 65
- Size: 1010x78x70mm
- Weight: 3,8kg



FLOOD LIGHT IP65

NEW!

- [F7001020] – 10W
- [F7001022] – 20W
- [F7001023] – 30W
- [F7001025] – 50W
- [F7001030] – 100W
- [F7001031] – 150W
- [F7001032] – 200W

- Material: Alluminum
- Working Voltage: AC85-265V
- Luminous Flux: 85-100 LM/W
- Color Temperature: Warm white 2800 -3200K, white 6000-6500K
- Beam Angle: 100-120°
- Life Span: 50000 hours
- IP65
- Weight: about 6.6 kg



LED WASHER RGB

[F7000465] – IP34

[F7000466] – IP34 + RE

[F7000470] – 216x 3in1 5050 RGB EDISON

[F7000471] – 216x 3in1 5050 RGB EDISON + RE

LED WASHER 16x3W 3 in 1 RGB

[F7000366]

LED WASHER 16x10W 4 in 1 RGBW

[F7000367]

- Power Supply: 90V-230V AC 50-60Hz
- Max. Power Consumption: 80(140)W
- LED: 16x 3(10)W RGB(W) 3(4)in1
- Control: DMX512, Master/ Slave, Sound
- DMX: 3, 5, 8, 14, 32, 34 channels
- RGB Color Mixing
- 1 Pixel = 2 diod, access to each pixel
- Strobe
- Dimmer 0-100%
- LED Chases
- Built in Microphone
- Display
- Size: 965 x 64 x 153mm
- Weight: 5,3kg

- LED: 216pcs x 10mm RGB
- LED: 216pcs x 3in1 5050 RGB EDISON
- Electronic dimming: 0-100%
- Strobe effect
- Materials: Die-casting aluminium
- Power Supply: AC 110-240V 50-60Hz
- Power Consumption: 20W
- Size: 135x1080x145mm
- Weight: 2,4kg



LED PAR 64 18x12W RGBWA 5in1 ZOOM IP65 **NEW!**

[F7000798]

- 18x12W RGBWA 5 in 1
- zoom angle: 15°-60°
- IP65
- No cooling fans - perfectly silent operation
- Auto, sound, DMX512(6/9CH)
- Voltage AC100/240V 50/60Hz
- Power consumption: 250W
- Size: 260x340x250mm
- Weight: 9.7kg



LED PAR 64 18x10W RGBW 4in1 IP65 BARNDOOR

NEW!


[F7000810]

LED PAR 64 18x12W RGBWA 5in1 IP65 BARNDOOR

NEW!

[F7000811]

- 18x10W RGBW 4 in 1 or 18x12W RGBWA 5 in 1
- Beam angle: 25°
- IP65
- No cooling fans - perfectly silent operation
- Auto, sound, DMX512
- Voltage AC100/240V 50/60Hz
- Power consumption: max 250W
- Size: 200x310x250mm
- Weight: 7,8kg

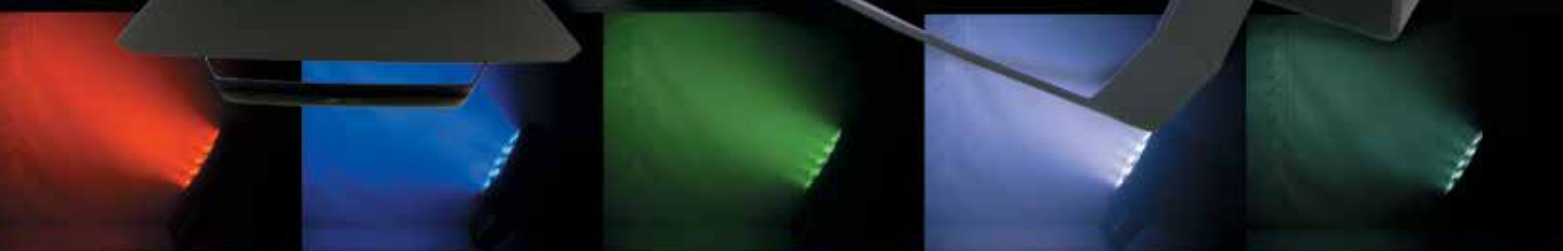

LED PAR 56 12x10W RGBW 4in1 IP65 BARNDOOR

NEW!

[F7000690]

LED PAR 56 36x3W RGBW IP65 BARNDOOR

NEW!

[F7000691]


- Led: 12x10W LED (RGBW) or 36x3W RGBW
- Beam Angle: 25°
- DMX512: 8 channels
- Control: Auto, DMX-512
- IP65
- No cooling fans - perfectly silent operation
- Connecting cables for use outdoors
- Can be connected in series to 10 devices
- Power Supply: 90V-230VAC, 50/60Hz
- Size: 200x280x230mm
- Weight: 5,4kg



LED PAR 36 6x10W RGBW 4in1 IP65 NEW!

[F7000218]

- LED: 6x10W RGBW 4in1
- Beam angle: 25°
- IP65
- DMX512(8ch)
- Voltage AC100/240V 50/60Hz
- Power consumption 80W
- Size: 140x140x160mm
- Weight: 1.6kg

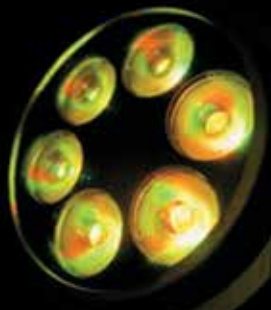

LED PAR 56 12x10W RGBW 4in1 ABS **NEW!**

[F7000260]

LED PAR 56 36x3W RGBW ABS **NEW!**

[F7000261]

- RGBW Color Mixing
- LEDs: 12x10W, RGBW 4in1
or 36x3W RGBW
- LED Lens Beam Angle: 25°
- Control Mode: DMX, Autorun and Master/Slave
- DMX512: 7ch
- Housing: ABS
- Power Supply: AC100V-240V, 50/60Hz
- Power Consumption: Max. 140W
- Size: 250x270x180mm
- Weight: 3kg



LED PAR 64 36x3W RGBW

[F7000039] - PAR 64 150W BLACK

[F7000041] - PAR 64 150W RGBW CREE

LED PAR 64 54x3W RGBW 25°

[F7000706]

- Red: 36x3W RGBW or 54x3W RGBW
- Manual and auto color settings.
- Modes: DMX-512, sound, auto, master/slave
- Low power consumption: Long live hour.
- Power Supply: AC 90-250V/ 50-60Hz
- Power: 140W or 250W
- Weight: 2 Kg
- Size: 240x240x330mm
- LED display



LED PAR 64 186x10mm RGBW DMX ABS

[F7000021] – SILVER
[F7000026] – BLACK

LED PAR 64 186x10mm RGBW DMX ABS + RE

[F7000022] – SILVER
[F7000027] – BLACK

- LED: 186x 10mm RGBW
- Control: DMX512, Auto, Master/ Slave, Sound
- DMX: 9 channels
- Color Mixing + Dimmer + Strobe
- Display
- Double handle enabling to put
- Short version
- Remote Controller (F7000022 or F7000027)
- Pass-through sockets (POWER IN POWER OUT)
- Power Supply: 230VAC 50-60Hz
- Max. Power Consumption: 20W
- Size: 210x250x218mm
- Weight: 1,2kg

NEW!

LED PAR 56 SLIM RGBW

[F7000245] – SILVER
[F7000255] – BLACK

NEW!

LED PAR 56 SLIM RGBW + RE

[F7000246] – SILVER
[F7000256] – BLACK

- Power Supply: 90V-230VAC, 50/60Hz, 30W
- LED: 154x10mm RGBW
(36xR, 48xG, 46xB, 24xW)
- DMX: 7 channels
- Function: Auto, DMX512, sound control
- Protection Level: IP20
- Remote controller (F7000246 or F7000256)
- Plastic cover
- Pass-through sockets (POWER IN POWER OUT)
- Size: 20x19x12cm
- Weight: 1,2kg



LED PAR 7x10W RGBW 4in1

NEW!

[F7000217]

- LED 7x10 W 4 in 1, • Max. Power: 80W • Fuse:240V/ 0,5A • Control: 6 channels DMX • Socket: 2x (DMX IN, DMX OUT), 3pin XLR • Dimension: 195x140x140mm • Weight: 1,5 kg



LED PIN SPOT

[F7000643] 3W

[F7000645] 5W

- Power Supply: AC 230V 50Hz
- LED: 3W or 5W White
- Size: 143x80x60mm
- Weight: 322g
- Light angle: 3°




LED PAR 36 RGB

[F7000210]

- LED:76 pcs (Red 40, Green 18, Blue 18)
- Diameter LED: 5mm • Voltage: 230V/ 50Hz • Max. Power: 10W • Fuse: 240V/ 0,5A • Control: 4 channels DMX • Socket: 2x (DMX IN, DMX OUT), 3pin XLR • Dimension: 195 x 140 x 140mm. • Weight: 0.8 / 1kg



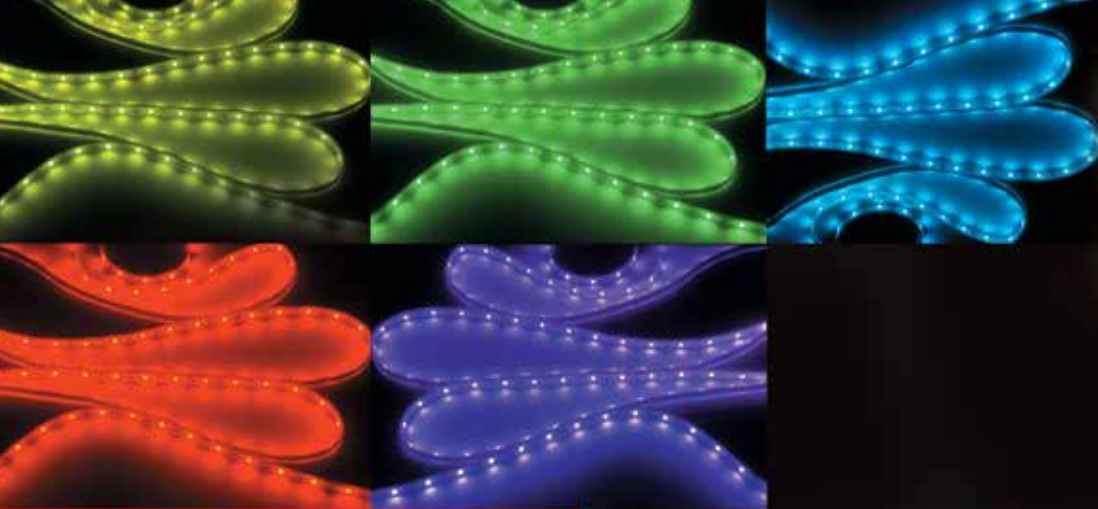

LED STRIPE RGB 30


[F7000124]

LED RGB (30 pcs per 1mb) • Power supply: 12VDC 2.5A • Can be cut down every 10cm • Breadth strips 10mm • IP 65 • 5m pack

LED STRIPE RGB 60

[F7000127]

LED RGB (60 pcs per 1mb) • Power supply: 12VDC 5A • Can be cut down every 10cm • Breadth strips 10mm • IP 65 • 5m pack

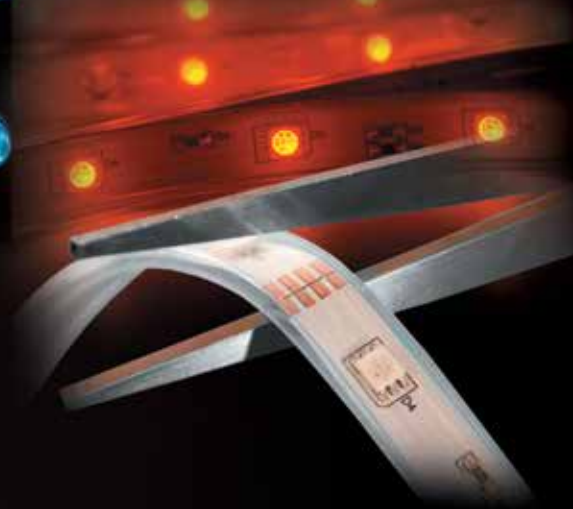

LED STRIPE WARM WHITE

[F7000128]

LED WARM WHITE (120 pcs per 1mb)
• Power supply: 12VDC 5A • Can be cut down every 10cm • Breadth strips 10mm • IP 65 • 5m pack

LED STRIPE RGB 60 230V, IP68, 50m + CONTROLLER

[F7000129]


- LED RGB (60 pcs per 1mb)
- Power supply: 230VAC - controller included
- Can be cut down every 100cm
- Breadth strips 10mm
- IP 68 (waterproof)
- 50m pack



FLG-256 RGB DMX

[F7000600]

31 sorts of displaying + 10 different gobos + 26 English letters made with help of LED mould • Strobe effect with adjustable speed • 256 diodes LED: 128 x RED, 80 x BLUE, 48 x GREEN • Working time LED: 100 000 hours • Sound control through build-in microphone device: program continues automatically when music is off • Control via DMX with Master/Slave function • Interface with digital display • Advantages: extremely long life, low power consumption , minimal heat emission. • DMX control via every standard DMX • 4 moulds with 64 diodes • Power supply: 230V / 50 Hz • Power consumption: 30W • Strobe: 18 Hz • Dimensions: 560 x 370 x 160 • Weight: 7 kg

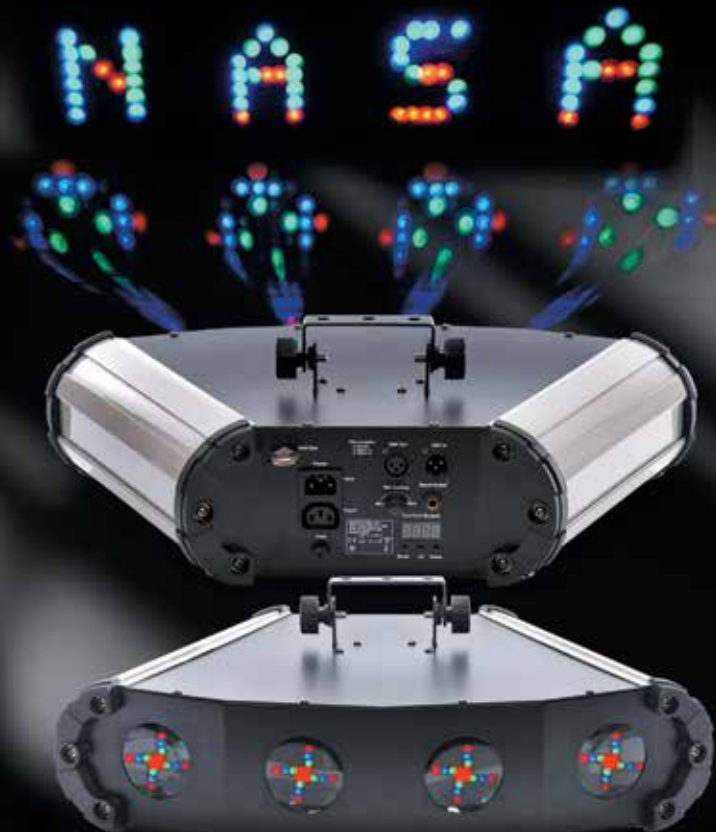

LED SIX HOLE LIGHT

[F7000603]



- LED: 2pcs*10W LED(RGBW)
- Automatic mode
- Sound controller mode
- Master slave mode
- Standard DMX control signal: 7 DMX channels.
- Power supply: AC220V/240V-50/60HZ
- Rated Power Consumption: 25W
- Inner box Size : 250×260×250 mm
- Weight: 2kg



LED MATRIX-4

[F7000605]

- LED source: 256pcs * 5mm leds (64R, 64G, 64B, 64W)
- Voltage: AC100~120V/ AC200V~240V
- Auto mode
- Sound mode
- DMX-512
- Master/slave mode
- Electronic dimming 0~100%, strobe effect
- weight: 5.5kg
- Dimensions: 300x252x227mm

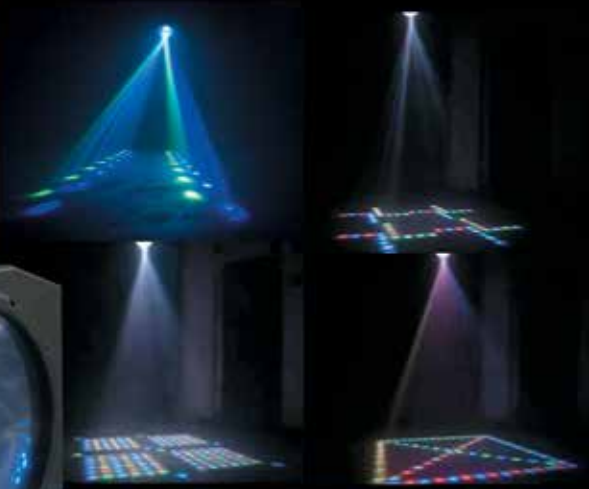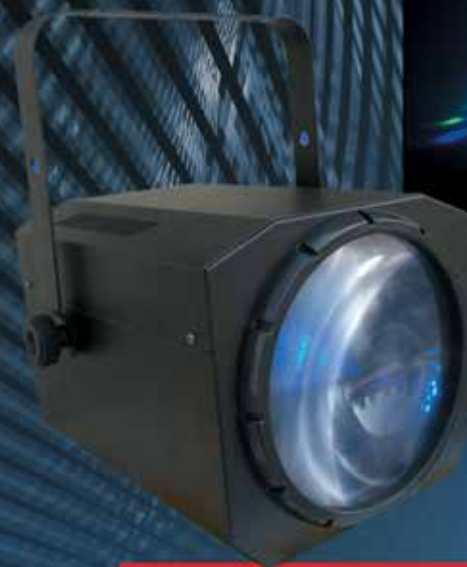

LED DOUBLE DERBY 2x10W RGBW 4in1

[F7000624]

- standalone , master/slave , music
- LED display for ease of use many features and options work
- Voltage: AC110/220-240V 50Hz/60Hz
- 7-channel DMX-512 LED centerpiece
- Programs in-built
- Actived sound
- Master-Slave

LED MARS 2x10W RGBW4in1

[F7000627]

- 7-channel DMX-512 LED centerpiece
- Light source 2pcs 10Watt 4-IN-1 RGBW LEDs
- 3 operation modes: DMX, Sound Active & Master/Slave



LED FIRE BALL 2x9W RGB 3in1

[F7000636]

Two beam-balls rotate around their own axis plus around the effect's main axis • 30 beams are thrown whirlwind-like throughout the room • Brilliant, intensive colors • Hanging or standing installation possible • When smoke is used, this effect becomes especially attractive


- Easy installation
- Sound-control via built-in microphone
- Power supply: 230V AC, 50 Hz ~
- Power consumption: 25 W
- Rotation-speed: 15 -30 RPM
- Number of LEDs: 2X9W Tricolor
- Dimensions (LxWxH): 560 x 205 x 280 mm
- Weight: 4.5 kg



LED MOONTH FLOWER LIGHT

[F7000610]

Voltage: AC 230V 50-60Hz • Power: 10W • Source: super-bright LED, 6pcs red, 6pcs green, 6pcs blue • Function: Gobo rotated • Control: Sound controller • Size: 240x170x110mm • Weight: 2,0kg

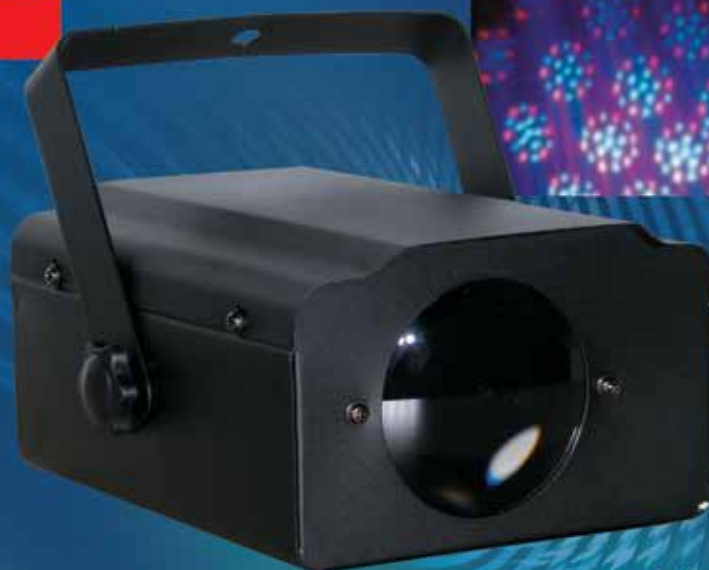

LED MAGIC BALL 20W DMX

[F7000620]

LED MAGIC BALL 3x3W RGB SOUND CONTROLL

[F7000622]

- Power supply: AC110-220V, 50/60Hz
- Rating power: 30W
- Light source: 6x3W RGB LED (3R, 3G, 3B)
- Play mode: Auto, Sound-activated, Master/Slave, DMX512
- DMX Channel: 6CH
- Effect: Water running effect, Strobe, Speed & brightness adjustable, the program selected color, color change.
- Function: LED Crystal Magic Ball is a new kind of products created by LED new technology, with strong plastic case, and 82 strong beams light. When its light spot on the wall, the effect was just like glass ball, very bright & powerful.
- Weight: 1KG



LED MAGIC BAR

[F7000630]

Voltage: 230V 60Hz • Light source: 144pcs 10mm RGB wash LED+128pcs 5mm RGB amber LEDs • Power consumption: 40W • Operation modes: Automatic running, DMX, Sound Active, Master/slave • 3 DMX channels • Digital display • Red, Green & Blue LED Wash(white can be chosen),can be used as Par Cans • Red, Green, Blue, Amber LED moonflower effect • In/Out IEC power connections to daisy-chain power



LED WATER EFFECT 10W CREE

NEW!

[F7000616]

- LED 1x 10W CREE
- Color wheel
- Size: 280 x 280 x 230mm
- Weight: 5kg
- Manual focus



LED ATMOSPHERE LAMP

NEW!

[F7000650]

- Colorful rotating lamp
- Long life up to 20 000 hours
- Energy saving for 80%
- Light emitter: 3x 3W LED
- Power supply: 85V-260V Input
- Socket: E27



LASER 1000mW RGB

[F4000237]

LASER 1500mW RGB

[F4000240]

LASER 2000mW RGB

[F4000250]

LASER 5000mW RGB

[F4000300]

- Power Supply: AC 110-240V 50-60HZ
- Laser: 650nm-red; 532nm-green; 450nm-blue
- Working mode: ILDA/SD Card/Sound Active/ Auto-play/DMX512/Master-Slave
- Control signal: DMX512
- DMX channels:13
- Operating temperature: -1°-35°
- Storage temperature: -10 -60°
- Warm-Up time :<35 min
- Modulation: TTL



LASER 300mW RGB SD CARD

NEW!

LASER 1000mW 3D RGB SD CARD

[F4000216]

- Power Supply: AC 230V 50Hz
- Control: Auto, DMX512, SD Card
- The ability to record to SD card, a project that will be displayed (need additional software, such F4000236).



[F4000217]

- Power supply: AC100V-240V 50/60HZ, 50W
- Laser Power: 800mW 532nm green laser, TE-cooled
200mW 650nm red laser, TE-cooled
350mW 450nm blue laser, TE-cooled
- Features: RGB color animation laser with 15KPPS high-speed optical scanner to create 3D Stereoscopic pictures. The new animations will show you 3D structure, realistic animation, smooth lines.
- Play mode: Sound Active, AUTO, DMX512
- Scanner: 15KPPS high-speed optical scanner, $\pm 20^\circ$ scanning
- Working environment: 10-40 degrees indoor
- Weight: 3.5KG
- Size: 30x26x18cm



LASER VIOLET + RED 300mW

[F4000215]

rated voltage: AC85-265V 50HZ-60HZ (Auto-adjust) • rated power: 15WN • laser power: 150mW red+150mW blue • laser wavelength: Red laser wavelength 650nm, Blue laser • wavelength 405nm • laser color: Violet red • sweeping system: 15Kpps scanner system • control mode: stand alone, music active, DMX512 • DMX512: 12 channels • cooling system: Fan system • size: 260×150×150(mm) • weight: 1.5kg



HARDWARE & SOFTWARE TO CONTROL LASER

[F4000236]

- Words roll display function
- Directly swtic function of the Truetype style
- Coreldraw pattern direct input
- ILDA file display and edit
- Laser show free edit and display
- Support with any ILDA DB25 interface laser show software
- Support any laser with TTL adjustment method
- Maxium control 5 laser lights with different display effects
- Friendly operation interface
- Convenient USB 2.0 connection method



LASER MINI RG

NEW!

[F4000200a]

[F4000201] - RE

A small device with huge potential. Two very bright lasers (red and green) running in Auto-Sound (control with built-in microphone). Two very bright lasers (red and green) running in Auto-Sound (control with built-in microphone). The device emits 'infinite' number of colored rays, which fill an entire room. Great for small and medium size discotheqs, pubs also for home party and school festivals.

- Power Supply: AC 230V (external power supply 5VDC)
- Laser: Red (650nm) + Green (532nm)
- Recommended temperature: 18-30 ° C (the device receives the full power of light after the normal working temperature)
- Control: Auto, Sound, wireless controller
- Size: 115 x 50 x 91mm
- Weight: 0,4kg
- Tripod included



LASER MINI RG + 8 GOBO

[F4000202]

[F4000202a] - RE

Holographic laser.
Star Projector.

- Power Supply: AC100V-240V, 50-60Hz
- AC adapter: DC 5V/1A
- Laser power: green 30mW@532nm
; red 100mW@650nm
- Work Mode: sound active, automatic
- Preheating time: 5-10m
- Working temperature: 10-35°C
- Dimension: 185x140x85mm
- Weight: 0,4kg



STROBE 1000W

[F9000015]


- Power Supply: 220V AC 50-60Hz
- Power Consumption: 1000W
- Fuse: F 5A, 220V AC
- Lamps: 1000W strobe lamp
- Max. ambient temperature: 45°C
- Max. cover temperature: 130°C



FL-1500SC STROBO DMX + SOUND CONTROL

[F9000020]

- Voltage: AC 220V +/-10%; 50-60Hz
- Power: 1500W
- Fuse: 20A
- Control: DMX512, sound control
- DMX: 3 channels
- Weight: 4kg
- Size: 540x300x205mm

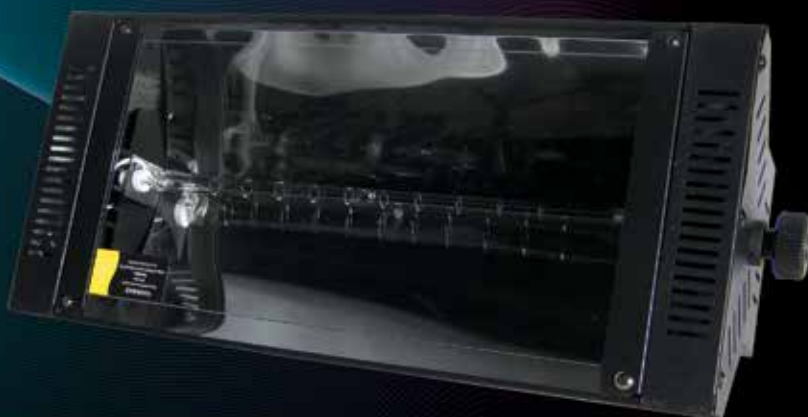

Follow Spot FL-1200 DMX

[F2001010]

Power supply: 230 V/ 50Hz • Lamp: HMI 1200W •
Control: DMX512 • Channel DMX: 4 • Colour: 4 colors + white, rainbow efekt • Colour temp: 3200K, 5600K, 6000K • Strobe: 1-11Hz • Angle light: 23o •
Size: 920 x 410 x 240 (mm) • Weight: 45kg



Search Light

FL-SL2000 Xenon (40kg, 630x630x850)

[F8000020]

Sky Rose 2500HMI (70kg, 630x630x850)

[F8000010]

Power Supply: 220V AC50Hz • Color Temperature: 7000K • Horizontal: 110o, vertical 40o • Shut down option for the rotating head • Lamp shut down function • Cover: Aluminum cover with insulated paint coat • Waterproof Grade: IP54



FLM-1200 - FOG MACHINE

[F5000107]

- Power Supply: AC 230V/ 50Hz
- Fuse: 250V/5A
- Tank capacity: 1l
- The readiness of the device after connecting to the power supply: about 8min
- Efficiency: 226,4m³/1min
- Control: remote control on the wire, wireless controller
- Weight: 3,5kg
- Size: 340x255x197mm



FLZ-3000 DMX FOG MACHINE

[F5000121]

- Power supply: 230V AC 50Hz
- Fuse: 250V 15A
- Power consumption: 3000W
- Warm-up time approx.: 10min
- Fog output: 40 000cuft/min
- Tank capacity: 10l
- Control: DMX512, wireless remote control, built-in timer
- Dimension: 660x360x300mm
- Weight: 16kg


FLZ-1500 DMX FOG MACHINE

[F5000102]

FLM-1500 FOG MACHINE

[F500105]

Dimensions: 570x365x300mm • Weight: 8,5kg •
Power Supply: AC 230V 50Hz • Tank capacity:
2,5l • The readiness of the device after connect-
ing to the power supply: about 8min • Efficiency:
566m³/min • Control: wireless remote control /
DMX-512

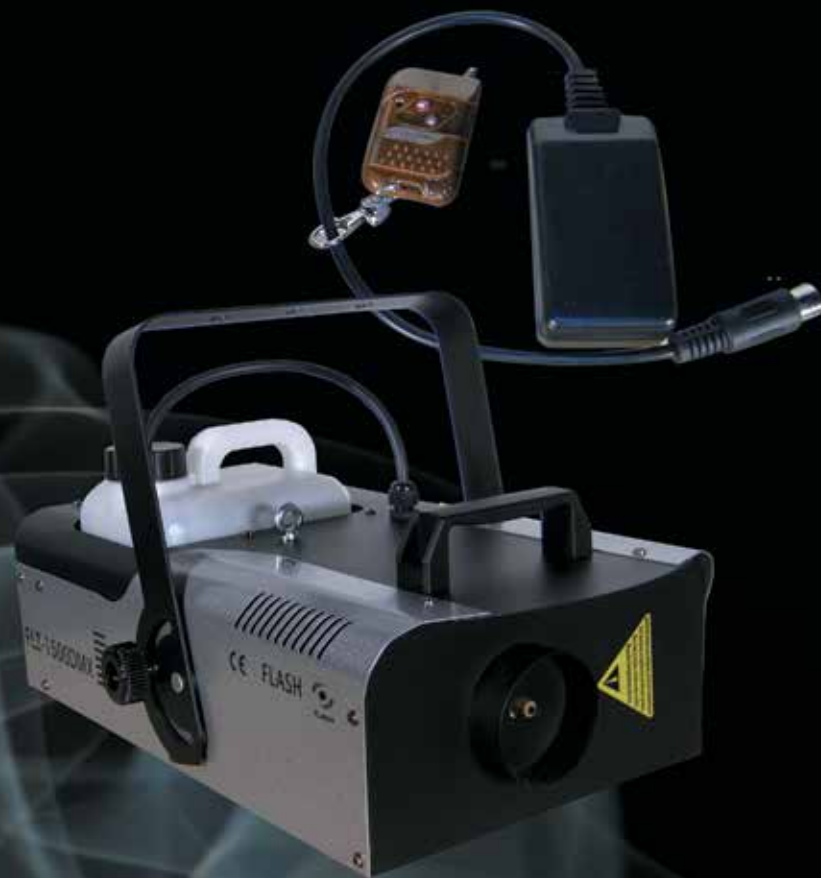

FLZ-2000 DMX FOG MACHINE

[F5000103]

Dimensions: 610x265x310mm • Weight: 11kg •
Power Supply: AC 230V 50Hz • Tank capacity: 6l
• The readiness of the device after connecting to
the power supply: about 5min • Efficiency:
800m³/min • Control: remote control on the
wire (with Timer), DMX512

This fog machine not only can be used as tradi-
tional fog machine but also can be used as up-
forward fog machine. The adjustable scope can
reach 180°. So only one fog machine can have
different function.



HAZER 1500 DMX

[F500095]

Dimensions: 625x280x260mm • Weight: 9kg
• Power Supply: AC 230V 50Hz • Tank capacity: 1,4l • The readiness of the device after connecting to the power supply: about 8min • Efficiency: 28,3m³/min • Control: remote control on the wire (with Timer), DMX512



FLM-600 FOG MACHINE Mini

[F500137]

Dimensions: 260x190x160mm • Weight: 2,5kg • Power Supply: AC 230V 50Hz • Tank capacity: 0,3l • The readiness of the device after connecting to the power supply: about 8min • Efficiency: 56,5m³/min • Control: remote control on the wire



MINI BUBBLE MACHINE

[F500500]

- Power Supply: AC110V-220V 50/60Hz
- Coverage: 50m²
- Dimension: 26x21x24cm
- Weight: 3,3kg
- Oil Tub Volume: 0,5l



BUBBLES FLUID 5kg

[F5100100]

This biodegradable juice liquid is non-toxic according to E.E.C. criteria and will not damage the environment.



FOG LIQUID

[F5100010] – light
[F5100020] – medium
[F5100030] – strong

Container volume: 5L • Professional quality dense and long-lasting smoke • Suitable for almost all modern smoke-machines • Very high purity components and comply with the EU stipulations • Liquid does not contain oil or follow products • Non-flammable • Water used for this product is double-distilled • Colorless and odorless • The product is liable to constant quality controls

LED STRIPE DMX RGB CONTROLLER

[F7000123]

RGB Controller-S is specially designed for controlling LED multicolor changing patterns. Its slim and delicate shape enables a no-sweat installatio. The design flrxibility on LED fittings will be enhanced enormously. The wireless controlling system is to make your home decoration possible with industrial products. Specifications:

- Working Temperature: -20 - 60°C
- In/Output Voltage: DC12V
- Dimensions: 95x65x25mm
- Connecting Mode: Common anode
- Recommended Current: 4A for each color
- Max. Current: 6A for each color
- Lenght or Quantity of LED fittings to control: Consult sales engineers of Flash-Butrym Sp.J.
- Application: can be working with any RGB items in 12VDC



LED STRIPE DMX CONTROLLER

[F7000122]

Working temperature: -20 – 60°C • Supply voltage: DC12V – 24V • Output: Four-CMOS open-drain output • Connection mode: common anode • External dimension: L165xW78xH40mm



INFRARED CONTROLLER

[F7000135] 44 Key
[F7000136] 24 Key

- Supply Voltage: DC12V
- Static power consumption: <1W
- Output current: <2A (each channel)
- Output power: <72W
- Output: 3 channels
- Connecting mode: common anode/cathode optional
- Dimension: 61x35x22mm
- Weight: 60g



FL-2401 DMX Controller

FL-2401

[F6000010]

240 channel DMX scroll controller • 30 banks, each composed with 8 programmable scenes; 8 faders, audio input and built-in MIC; sound triggered, at sound activation state • Auto play through TAP SYNC or set up trigger time via SPEED fader • Comprehensive MIDI control options via interface • 8x2 LCD with illumination • Freely set up channel location, pause the operation of programs • Overlapping operation of page A and B; any channel fine adjustment • Blackout function can be carried out manually or remotely via MIDI • CHASES programming • 6 CHASES overlapping operation, controllable manually or remotely by MIDI • Fade time control • Pan/tilt controlled by jog-wheel • DMX+/- charge option • x, y axis can set up wheel control



48 CH

48ch DMX DIMMER CONSOLE

[F0064545]

48 control channel DMX • 96 memorizable programs via 4 pages • 24 scenes can be called directly via the faders • Blackout-function • Sound control via Line In connection • 19" mounting dimensions with 6 units • Power supply: 230V/50Hz • Power consumption: 6W • DMX-512-output: 3-pin XLR-connector with polarity selector • 710x266x90 • 6,3kg



24ch DMX DIMMER CONSOLE

[F0064540]

24 control channel • 48 memorizable programs via 4 pages • 12 scenes can be called directly via the faders • Blackout-function • Sound control via Line In connection • 19" mounting dimensions with 6 units • Power supply: 230V/50Hz • Power consumption: 4W • DMX-512-output: 3-pin XLR-connector with polarity selector • 482x264x85 • 4,8kg



24 CH

4ch DMX DISTRIBUTOR (SPLITER)

[F0064810]

DMX distributor with one input and four outputs • Absolute electric isolation between input and output, or between output and output • Two types of DMX connector (3 pin & 5 pin) for each individual channel • Every DMX output features an independent driver, data & data-indicator • DMX switch is incorporated allowing isolation from the malformation caused by DMX input • Input and output with a set of respective power supply and 500 mA internal fuse • Power supply: 230V/50Hz • Power consumption: 20W • Dimensions: 277x172x72 • Weight: 2,6kg



4ch DIMMING PACK

[70064072]

4 controllable channels • 5A resistive load per channel • Maximum current 16A • Outputs via 4 safety sockets • LED diode of all channels • DMX-512 input and output • Analog 0-10V input and output • Music program • DMX-starting address adjustable via Dip-switches • Power supply: 230V/50Hz • Max. Power output: 3680W • Resistive load/ channel: 1150W • 318x165x96 • 3kg



6ch DMX DIMMER PACK

[70059890]

Three-phase operation • Analog (0-10V) and DMX dimming control • 6 controllable channels • 20A inductive load per channel • Maximum current 60A CE • Lamp pre-heat adjustable via fader • Outputs via screw-connector • Analogue connection via 8-pin DIN-plugs • 19"-dimensions with 2 units • Power supply: 230V/50Hz • Operation: 1 or 3 – phase • 482x381x89 • 8,4kg



2,4G DMX WIRELESS TRANSCEIVER NEW!

[F0070000]

2,4G DMX WIRELESS RECIVER NEW!

[F0070005]

- Radio Parameters Communication Distance: 600 m (open spaces, different depending on the environment has changed)
- Frequency: 2.400 - 2.4835GHz, ISM, 126 RF channels
- Modulation: GFSK
- Maximum Transmit Power: 23dBm
- Receiver Sensitivity: -94dBm
- DMX Signal Interface RS485
- Environmental Limits Operating temperature: -40 - 85 °C
- Storage Temperature: -65 - 150 °C
- Ambient Relative Humidity: 5 to 95% (non-condensing)
- Power Requirements Power Input: 9 - 22 VDC
- Power Consumption: 70 mA@12 VDC max.



Hook

- [F0000030] - max. 200 kg
- [F0000040] - max. 30 kg
- [F0000050] - max. 500 kg
- [F0000060] - max. 500 kg double rotating
- [F0000080] - max. 50 kg
- [F0000090] - max. 100 kg

Aluminium Hook for installing projectors, lighting effects etc.
via a trussing system • For trussing systems with a tube
diameter of 50mm

[F0000085] – Moving Head Hook 100kg

Size: 25,5cm x 5cm x 18,5cm
adjustment boot: 7,0 - 18,5cm
Waight: 1kg



100 kg



100 kg



30 kg



500 kg



200 kg



500 kg



50 kg



FLASH

„Flash-Butrym” Sp.j

Sales departament:

Lubieszyn 4E, 72-002 Doluje, PL

Tel.: +48 91 48 31 486

Fax.: +48 91 48 31 390

Mobile: +48 668 155 555

Email: info@flash-butrym.pl

www.flash-butrym.pl

Service:

Lubieszyn 4FG, 72-002 Doluje, PL

Tel.: +48 91 48 31 486

Fax.: +48 91 48 31 390

service@flash-butrym.pl